



The TOTAL SHOTGUN SLING

Firearm safety is your individual responsibility. You must carefully examine and be sure the firearm is unloaded. You must visually inspect the chamber and the magazine to make sure they are clear/empty. You must remove the cartridge clip, if present. These activities must be performed each time you install or remove **The TOTAL Shotgun Sling, The TOTAL Magazine Tube Cap and/or The BRUTE™ Sling Swivels.** This detailed information must be given to anyone using your **The TOTAL Shotgun Sling, The TOTAL Magazine Tube Cap and/or The BRUTE™ Sling Swivels.**

Thank you for selecting this product for your personal use... **NOW** please follow the important instructions as illustrated and described below.

1. Lay **The TOTAL Shotgun Sling** on a flat surface and identify the different parts. Read all instructions before installing **The TOTAL Shotgun Sling.** **Figure 1.**

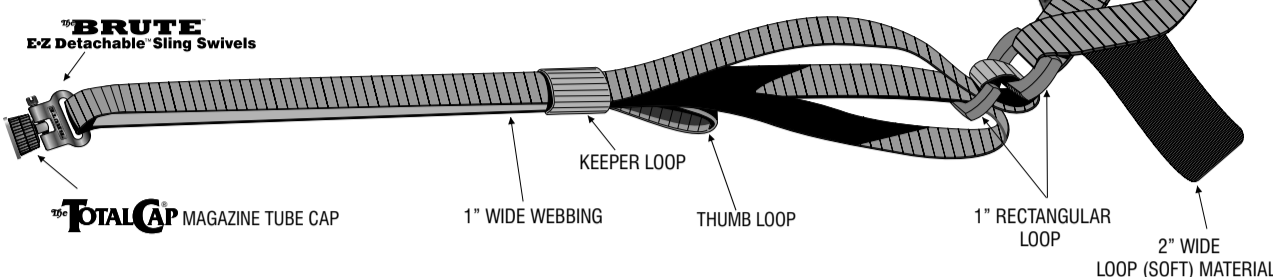


FIGURE 1

2. Insert (stand) the toe of the stock into the 1" webbing loop as shown in **Figure 2.** Pull upon the sling to begin forming the 1" wide webbing loop around the stock. The 1" wide webbing should cross butt of the stock at mid point between the toe and the heel of the stock. **Figure 2 & Figure 7.**

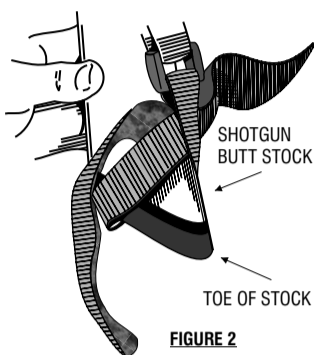


FIGURE 2

3. Carefully lay the shotgun onto its side. Wrap the loop (soft) material over the comb (top) of the stock. **Figure 3.**

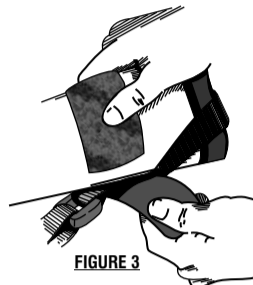


FIGURE 3




FIGURE 4

4. Center the butt of the stock in the 1" webbing loop. Press the end of the loop (soft) material down toward and under the hook (stiff) material. **Figure 4.** This is the beginning of the very important closure of the sling attachment device (hook and loop material). There must not be any slack or looseness in the area of the 1" webbing and the hook/loop closure.

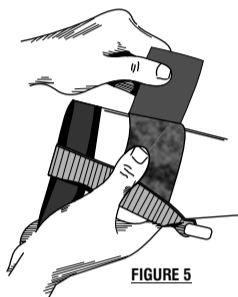


FIGURE 5

5. The hook (stiff) material must be stretched over the comb (top) of the stock on top of the loop (soft) material to form a secure closure. **Figure 5.** Extreme care must be exercised to make sure no bubbles, wrinkles, etc. occur in this closing process. The closing process should begin where the hook (stiff) material is first applied to the loop (soft) material and should be pressed together as the hook (stiff) material is being placed/applied onto the loop (soft) material.

6. All slack, looseness, bubbles, wrinkles, etc. must be worked out of the joining of the hook/loop materials. After a satisfactory closure is made, use your thumb and forefinger to, again, apply pressure to the total surface of the hook/loop materials. **Figure 6.**

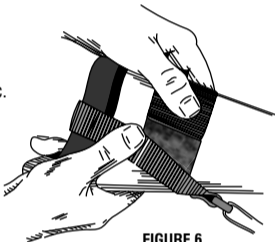


FIGURE 6

7. **NOW...** pull and tug on the sling attachment device to check and to make sure you have a safe working installation of your **TOTAL® Shotgun Sling.** **Figure 7. This is necessary to prevent accidental dropping, damage, or discharge of your firearm.**





FIGURE 7

The TOTALCAP MAGAZINE TUBE CAP w/ROTATING SWIVEL BASE



The TOTALCAP Magazine Tube Cap INSTALLATION:


- Carefully remove/unscrew the factory magazine tube cap, following in detail, instructions issued by the firearm manufacturer to perform this activity.
- Care must be given to prevent the escape or loss of the spring and other parts that may be in the magazine tube of your firearm.
- Install **The TOTALCAP Magazine Tube Cap** with swivel base to replace the factory magazine tube cap.
- The TOTALCAP Magazine Tube Cap** must be securely tightened to insure safe and correct use of your firearm. (Hand tight is satisfactory-*No Tools Necessary*)

CAUTION: Any firearm, if handled improperly, ignoring reasonable rules of safety can be dangerous and/or potentially cause death, injury or property damage.


The BRUTE™ E-Z Detachable™ Sling Swivels

E-Z Installation

- Unscrew the threaded swivel base pin, using thumb and finger, far enough to allow the swivel to be placed upon the swivel base on the firearm. A coin may be used in the coin slot if necessary. The threaded base pin does not need to be removed from the swivel body (preventing loss).
- Position the swivel base between the "legs" of the swivel body.
- Align the base pin with the through-hole in the swivel base allowing the pin to pass into and completely through the swivel base.
- Screw the base pin into **The BRUTE Swivel** with your thumb and finger. A coin may be used if necessary.
- The base pin will engage the internal threads in the opposite leg of **The BRUTE Swivel.**
- The "O" Ring on the base pin will seat into the recess on the side of the swivel leg to retain/secure the base pin when fully engaged/seated.
- Complete/full seating of the "O" Ring base pin assembly is necessary to ensure correct/proper and safe installation of **The BRUTE Swivel.** Correct installation will prevent disengagement of the swivel during normal usage.
- The base pin does not need to be overly tight or stressed to be secured. A good snug fit of the base pin is all that is necessary.

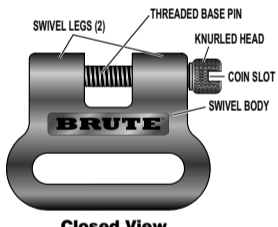

Closed View

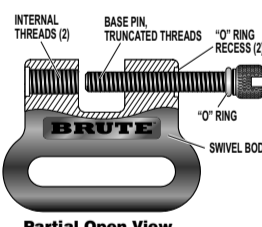

Partial Open View

E-Z Removal

- To open or remove **The BRUTE Swivel** from the swivel base, unscrew the base pin. A coin may be used in the coin slot if necessary.
- Do not remove the pin from the body of the swivel (preventing loss).

The BRUTE Sling Swivel is a well designed mechanical device. Only superior materials and the most advanced techniques are used in manufacturing. The threaded base pin should be lightly oiled to prevent corrosion and retain good appearance and working order, as designed.

! CAUTION ! CAUTION ! CAUTION !

The BRUTE Sling Swivel must not be overloaded or improperly stressed. **The BRUTE Sling Swivel** must be examined periodically to insure correct installation. Correct installation of **The BRUTE Sling Swivel** requires:

- The threaded base pin must be screwed completely into and through both swivel legs.
- The "O" Ring must be completely seated into the "O" Ring recess in the swivel leg.

See the closed view pictorial.


THUMB and FINGER is all the force necessary to install The BRUTE Sling Swivel. (No tools required)

THE TOTAL SHOTGUN SLING ADJUSTMENT:


EXTEND/LENGTHEN

Grasp, firmly, the two outside straps of the sling immediately **below the thumb loop.** While securely holding your shotgun in one hand, pull the two outside straps down and away from the forearm of your shotgun to achieve the desired adjusted position (length).

1.

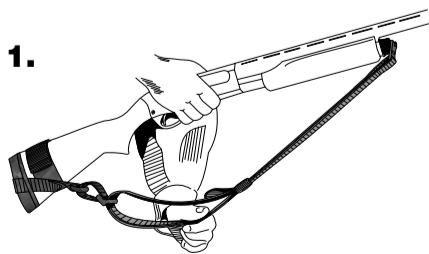


2.

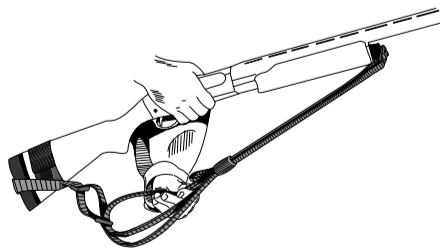

CLOSE/SHORTEN

Grasp the inside (one) strap of **The TOTAL® Shotgun Sling** immediately **below the thumb loop** and pull the strap down. Repeat this procedure as necessary to achieve the desired closed/taut position.

3.

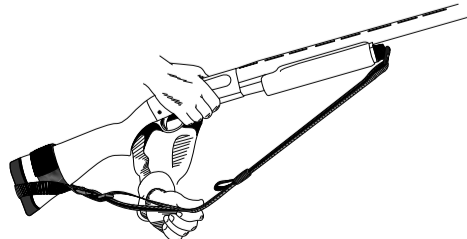

SET/LOCK INTO POSITION

Set and securely hold the desired adjusted position by grasping the entire sling and pushing outwards and pushing it away from the shotgun.



CAUTION: Never climb, run, jump or participate in any careless activity that will result in loss of safe control of your firearm at any time.



7901 Panther Way • Waco, TX • 76712-6556 • USA
Phone: 254-772-5575 • Fax: 254-776-3553

800-533-6076

www.OutdoorConnection.com